

Spectrophotometer
For continues In- Line colour and organic components
measurement

NEW HK5



Harrer & Kassen GmbH
Am Heschen 4 - 6
D - 75328 Schömburg - Langenbrand

Tel.: +49 (0)7084/9248-0
Fax: +49 (0)7084/9248-29
www.harrerkassen.com
info@harrerkassen.com

Description:

Colour measurement based on the standard CIELAB and NIR measurement. Continuous in-line identification of colours and organic components.

Through the modular construction (Sensor and evaluation unit are separate), the sensor can be installed at a difficult accessible places. This ensure the easy handling.

With the easy to use calibration function (calibration button), our customer can take spectra's for the calibration with the calibration button at the measurement place and read the internal stored spectra's with the calibration software.

Due to this function and the open calibration system our customers can expand independent an existing calibrations or create new calibrations.

Measurement Design:

In a **Pipeline, Tank, Vessel** with a Varinline flow cell or on a **Conveyor Belt**.

Conditions for conveyor belt:


The sensor system is located **max. 150mm** over the to be detected product surface. The product surface is approximately smooth and planar. are moving on a conveyor belt under the sensor system.

Fine powder products are planed by a scraper.

For top-quality measurement results the environment has to be dust-free. With the cleaning system of "compressed-air" the sensor can keep dust- free.


Advantages:

In difference to spectrophotometers from the competition, the HK5 is not operating with Xenon-Flashlight. The controlled LED (Lifetime min. 10 years) illumination gives an improved stability of the measurement.

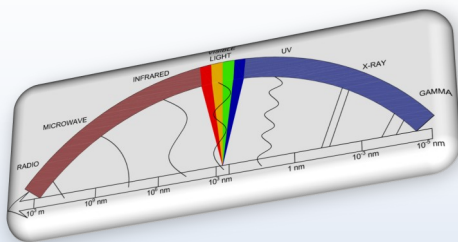

The CIELAB-System is a colour space, which was specified by the International Commission on Illumination CIE (Commission Internationale de l'Éclairage) in the year 1976. It was further derived from the CIE colour system and is based on the CIE "master" space which was introduced in the year 1931. CIELAB system is today the most common colour system.

On the basis of this equipment independent 3D-colour model, colour differences can be identified numerically. The model is impartial and complies nearly the human perceptiveness, by adapting the geometrical distance between two colours in the colour space with the human perception.

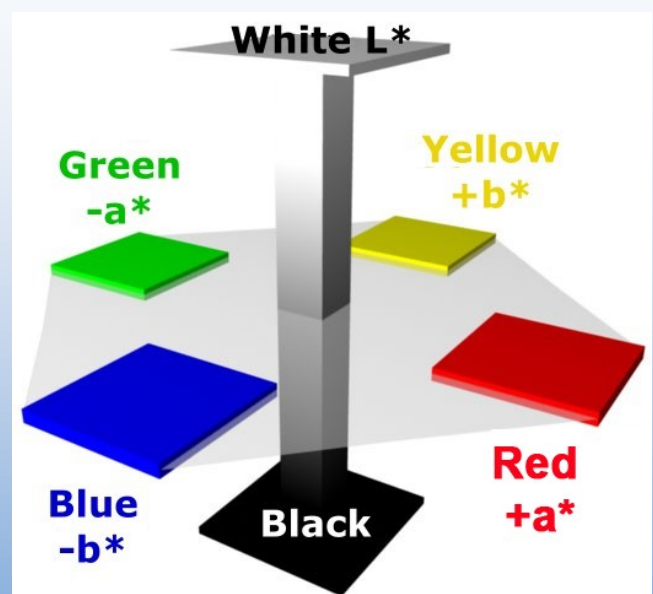

In-house Test Measurements

HK7-Colourmaster Build 1.0.1

HARRER KASSEN HK Colourmaster

White Reference

Edit White Reference

Send White Reference

☒ Password protect

Measurement Parameter

Standard

L: 56.87

a*: 43.69

b*: 41.88

Hitch

L: 2.33

a*: 5.99

b*: 19.83


Product 1

Save product Cancel

Send Dataset

Communication Setup


COM-Port: COM3 COM-Speed: 38400

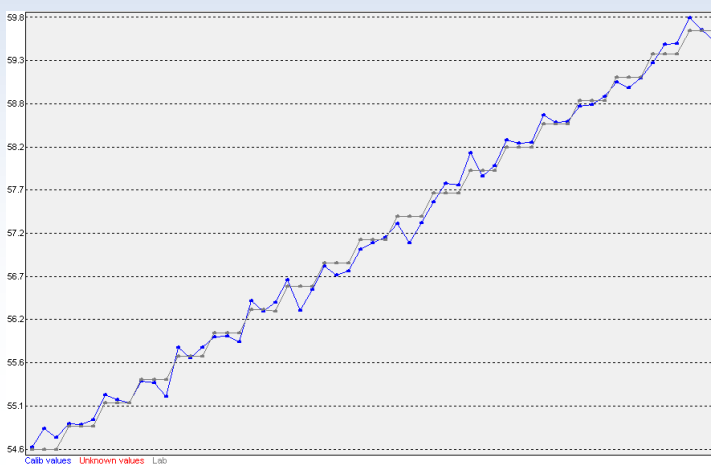

Test measurement: Moisture

Measuring range: 54- 60%


Middle CV deviation: 0,002

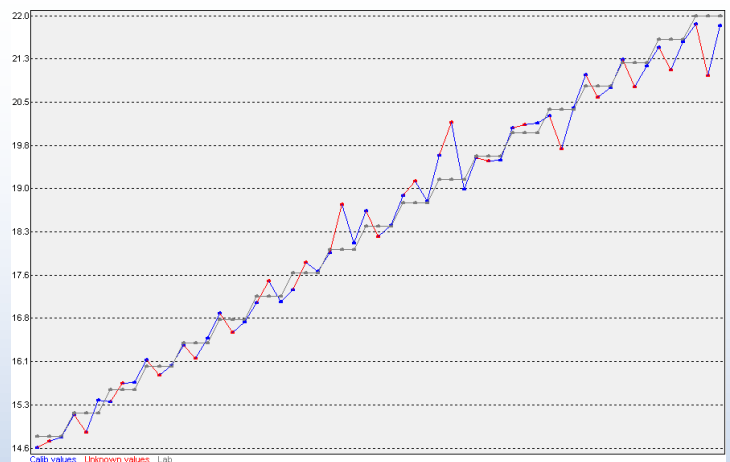

Test measurement: Alcohol

Measuring range: 14– 22%

Middle CV deviation: 0,007

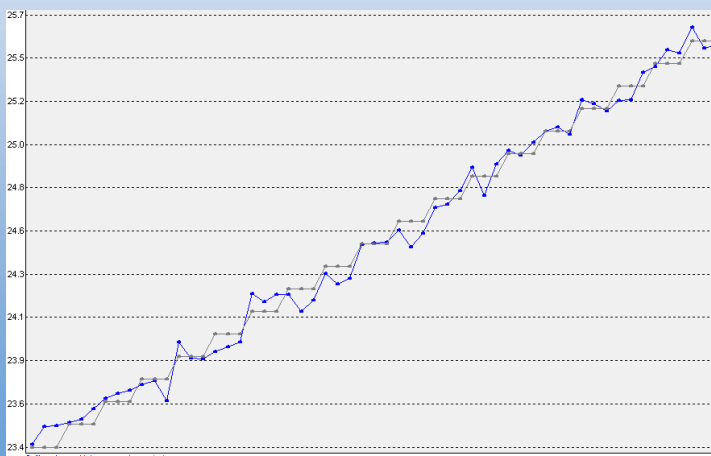

Test measurement: Fat

Measuring range: 23– 26%

Middle CV deviation: 0,0025

Advantages:

- State- of- the- art technology
- Installation at a difficult accessible place is easy to handle with remote access
- Non- destructive measurement
- Easy to use software
- Open system:
 - existing calibration can be expanded
 - new calibrations can be created independent
- 10 Spectra's are evaluated per sec.
- Low maintenance
- LED technology

Customer Benefit:

- Real time measurement
- Continuous monitoring over the whole production
- Production with constant and documentable quality
- Early detection of fail production
- Menu in different languages
- Sensitive data are in a protected menu
- After commissioning the user interface can be locked
- No drift of the measured values through lamp aging

Technical data evaluation unit:

| | |
|-----------------------------|---|
| Housing: | Stainless steal |
| Size H x W x D: | 400 x 499 x 212 mm |
| Weight: | ca. 20 kg |
| Protection Type: | IP66 / NEMA 4 |
| Power supply: | 85 - 265 V/ AC, optional 24V |
| 2 Analog outputs: | 0/4 - 20mA / isolated 1500V |
| PC- interface: | RS232 or RS485 |
| Digital input: | Ext. Start / Stop |
| PROFI-Bus/ Net/ Modbus TCP: | optional |
| Operation: | 6 in membrane keypad integrated soft keys |
| Display: | 2x 24 Sign LCD, LED- backlight |
| Environmental temperature: | -20°C - +40°C |
| Connection: | via fibre optic |

PC- requirement:

- 300 MHz clock speed (at least) recommended Pentium III- Processor (or faster)
- Windows 7 (32 und 64 Bit) or higher
- 512 MB RAM (or higher)
- USB interface

Technical data sensor:

| | |
|----------------------------|----------------------|
| Housing: | Aluminum die casting |
| Size H x W x D: | 120 x 220 x 90mm |
| Size H x W x D: | 280 x 230 x 110 mm |
| Weight: | ca. 4 kg |
| Protection Type: | IP65 / NEMA 4 |
| Environmental temperature: | -20°C - +40°C |

Scope of supply:

The HK5 is supplied with sensor, evaluation unit, calibration button and software.

At the commissioning, the operating personal gets a device instruction / training.

Directives:

The HK5 is CE- conform, according to the followings directives:

- EMC directives 2014/30/EU:
 - generic standards EN 61000-6-2
 - generic standards EN 61000-6-4
- Low- voltage directives 2014/35/EU
- RoHS directives 2011/65/EU